


TURF CLAW PRE SET GLUE BOX INSTALLATION GUIDELINES

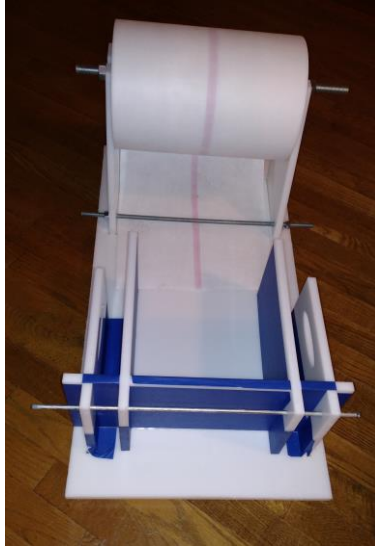

Turf Claw High Density Pre Set Glue Box

- The High Density Pre Set Glue Box ships flat and is easy to assemble. The front rod when inserted keeps the trowel front held down tight to insure an even distribution. Set up as is the yield is 250 ft per pail. It is easy to adjust so that you can control the amount of adhesive you wish to apply to more or less. It is the installer's responsibility to determine the correct amount of adhesive for the application.
- Turf Claw is designed so that you will want to get your synthetic turf product in contact right away. You will have time to adjust your seam if you need to. Rolling every 30 to 45 minutes for at least three times is recommended. Be sure to not press adhesive up out of the seam. If the surface is uneven you may add enough weight to keep the turf and the adhesive in constant contact until it begins to grab, usually within 2-4 hours but much sooner in certain conditions and longer in others. The more moisture in the environment, the quicker the cure.
- The reservoir does not have a back on it for a reason. You should only be pouring Turf Claw when you are pulling tape. Adhesive standing in your glue box at any time while tape is not being pulled will eventually begin to migrate. Do not let seam tape run out. As you reach the end of a roll, feed another under the first for a clean transition.
- Many users apply tape to help make clean up easier. The High Density Plastic wipes clean and cured Turf Claw will peel off easily. Avoid scratching as it will make Turf Claw more difficult to remove.
- It is highly recommended that the installer practice with a glue box before an actual on-site installation if there is no previous experience with a glue box application. When used with our SL 1200 Red Stripe Seam Tape it is very easy to do both long and short runs, arcs and logos. It is ideal for sports fields, putting greens, playgrounds and lawns.

Practice Makes Perfect. Once you become familiar with this application you will never go back to troweling. Please call with any questions.



SYNLOK ADHESIVES

PO Box 137
Stony Point, NC 28678
888.796.5655 toll free |
sales@synlokadhesives.com